



ELECTROMECHANICAL 2-POST LIFT

# SMART LIFT

*THE SMART ORIGINAL*



## THE ORIGINAL NUSSBAUM LIFT

- ✓ Flexible in height: Ideal for low ceiling workshops
- ✓ Asymmetric lifting arms and carriage for optimal door clearance
- ✓ Small footprint - Saves space
- ✓ CE-Stop - no disturbing foot guards

**3000 KG | 3500 KG | 4000 KG**



ELECTROMECHANICAL 2-POST LIFT

# SMART LIFT

## Sturdy, reliable and ready

The SMART LIFT is THE classic NUSSBAUM lift: it is the result of 40 years experience in the manufacturing of lifts. Featuring a tried and tested design. More than 100,000 units are installed worldwide.

### SAFE


- ✓ Automatic locking of the arms
- ✓ Safety nut under the carrying nut
- ✓ Optical control of the wear out of the carrying nut

### LONG LASTING

- ✓ Low wear Nylatron-nut guarantees a quiet operation
- ✓ Resistant and almost wear-free Poly-V belt

#### Minimal height of only 2890 mm

The data and electric cable that connect the 2 columns can be installed above the columns or in the floor

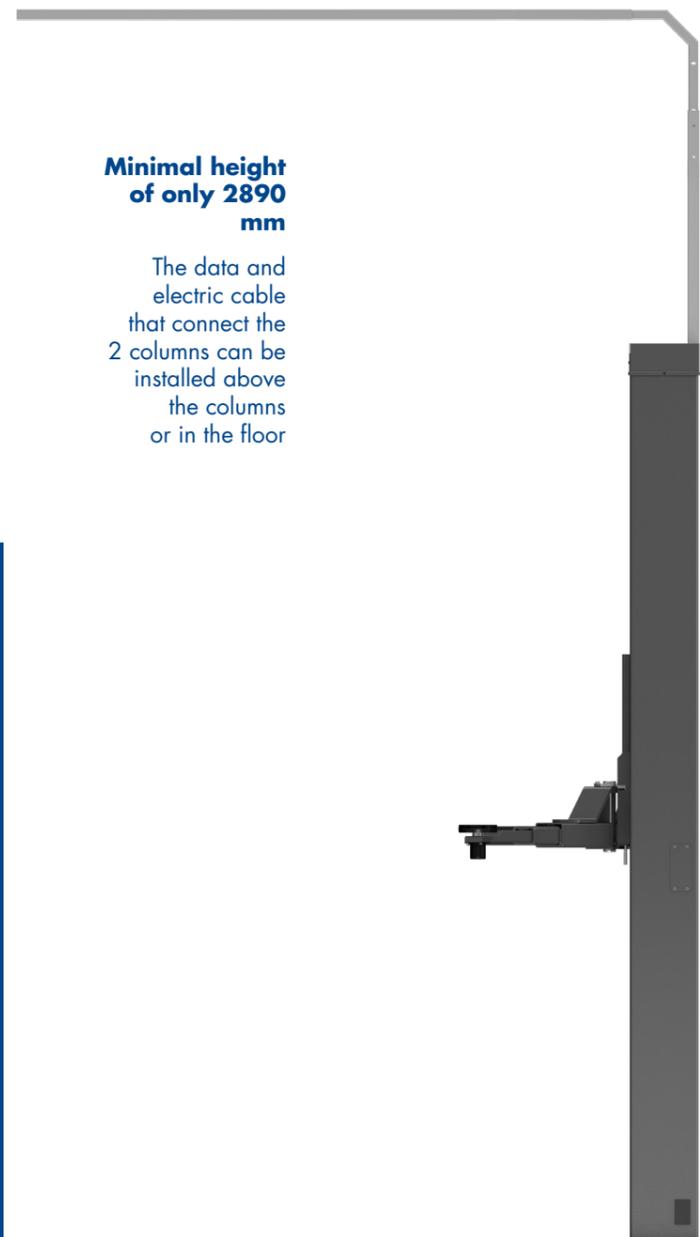

### Lifting arm versions available

- For SMART LIFT 3 and 3,5 tons

#### DT (3 STAGE ARMS)

The short lifting arm has 3 stages, providing a large adjustable range and therefore enables to lift small and wide vehicles.

- For SMART LIFT 3,5 tons only

#### MM (MINI-MAX ARMS)

Adapter for deep drawn side skirt and off-road vehicles. Quick vertical multilevel adjustment, hand and foot operated.

#### SPORT CAR ARMS (SC)

Extremely flat and sturdy arms made of solid material enable the lifting of very low and wide sports cars.

- For SMART LIFT 4 tons

#### UNIVERSAL ARMS

Extended 3 stage lifting arms for lifting cars and vans up to Mercedes Sprinter with long wheelbase on alternative pick up points.

### SMART LIFT: THE ONE LIFT YOU NEED




Wide opening of the vehicle's front doors



3 stage lifting arm



Mini-Max lifting arms : easy and convenient to lift off-road vehicles as well as low clearance vehicles

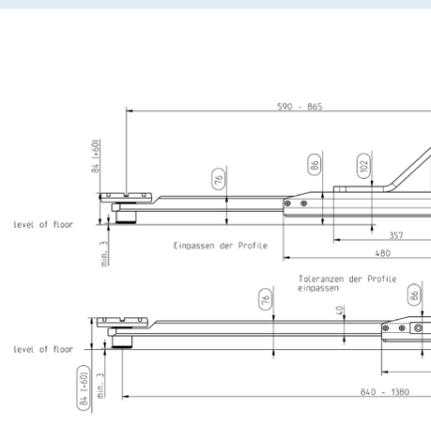

SC (Sports car arms): extremely flat construction. Very sturdy, made of solid material. Especially suitable for very low and wide sports cars.

## THE SMART CHOICE

- Flexible: No ground connection between columns and adjustable height of top connection
- Suitable for a large range of vehicles
- Distance between the columns of 2460 mm
- Pick-up points starting at 75 mm\*
- Short lifting arms swivelling 180°



## MAKE YOUR SMART CHOICE

SMART LIFT		2.30 SL	2.35 SL	2.40 SL
<b>Lifting capacity (kg)</b>		<b>3000</b>	<b>3500</b>	<b>4000</b>
<b>Lifting/lowering time approx. (sec)</b>		<b>40/40</b>	<b>46/40</b>	<b>46/40</b>
<b>Lifting height (mm)</b>		<b>2010</b>	<b>2060</b>	<b>2060</b>
<b>Lowest lifting point (mm)</b>	Version DT	<b>95-140</b>	<b>102-166</b>	-
	Version MINI-MAX	-	75-185	-
	Version SC	-	84-144	-
	Version UNIVERSAL	-	-	102-166
<b>Total height column (mm)</b>		<b>2890</b>	<b>2890</b>	<b>2890</b>
<b>Top connection (mm)</b>		<b>3720-4120</b>	<b>3685-4170</b>	<b>3685-4170</b>
<b>Total width (mm)</b>	Version DT	<b>3100</b>	<b>3230</b>	-
	Version MINI-MAX	-	3350	-
	Version SC	-	3350	-
	Version UNIVERSAL	-	-	3350
<b>Drive-through width (mm)</b>	Version DT	<b>2314</b>	<b>2400</b>	-
	Version MINI-MAX	-	2520	-
	Version SC	-	2520	-
	Version UNIVERSAL	-	-	2514
<b>Column distance (mm)</b>	Version DT	<b>2560</b>	<b>2650</b>	-
	Version MINI-MAX	-	2770	-
	Version SC	-	2770	-
	Version UNIVERSAL	-	-	2770
<b>Arm-extraction long (mm)</b>	Version DT	<b>945-1495</b>	<b>940-1495</b>	-
	Version MINI-MAX	-	1000-1480	-
	Version SC	-	840-1380	-
	Version UNIVERSAL	-	-	1130-1840
<b>Arm-extraction short (mm)</b>	Version DT	<b>480-870</b>	<b>570-1160</b>	-
	Version MINI-MAX	-	600-1000	-
	Version SC	-	590-865	-
	Version UNIVERSAL	-	-	570-1160
<b>Motor (kW)</b>		<b>2 x 1,5</b>	<b>2 x 1,5</b>	<b>2 x 1,5</b>

### ACCESSORIES



Height adapter 44 mm



Height adapter 155-245 mm



U-form adapter 150-233 mm

### More accessories available