



UNIVERSAL LIFTING FRAME 1.25

LIFTING BRIDGE

Requests to:
salesadmin@nussbaumlifts.com

Plug-and-play solution:

Ready for immediate use without any changes to the lift

Precise work: Safe, centred lifting and lowering of heavy loads, e.g. battery modules, motors in and out of transport crates



UNIVERSAL. FLEXIBLE. NUSSBAUM.


- Universally applicable: Compatible with all standard two post lifts with pick up pads up to Ø 128 mm
- Easy integration: No conversion necessary - simply attach, secure and get started
- Use on the existing 2 post lifts
- High capacity: Stable, low-vibration lifting mechanism for maximum safety
- Fast workflow: Reduces assembly and disassembly times



SIMPLY LIFT. POSITION SECURELY.



With the new Nussbaum solution, lifting heavy loads of up to 1250kg, e.g. battery modules and engines, in and out of transport crates is very easy. The system uses the existing 2 post lifts. This allows high-voltage batteries to be lifted out of the crate precise, safe and ergonomical. Whether in service, assembly or development - its universal applicability and ease of use ensure maximum efficiency in everyday work.

Fast. Safe. Nussbaum.

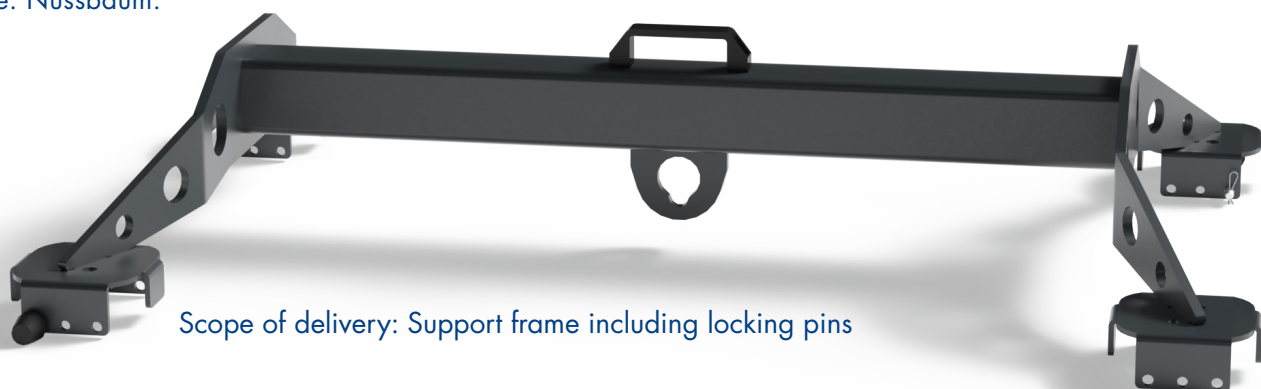


Scope of delivery: Support frame including locking pins

THE RIGHT DATA FOR SUCCESS

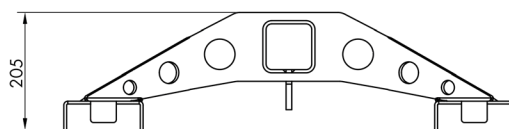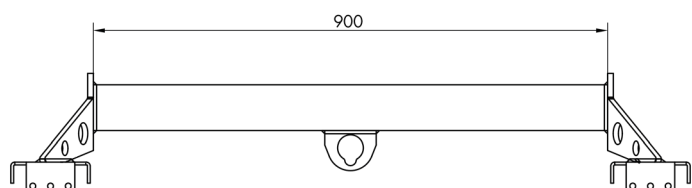

Lifting capacity (kg)	1250
Max. pad diameter (mm)	128
Max. pad height (mm)	32
Net weight (kg)	22,5
Dimensions (mm)	1190x790x225
Item number	0034748

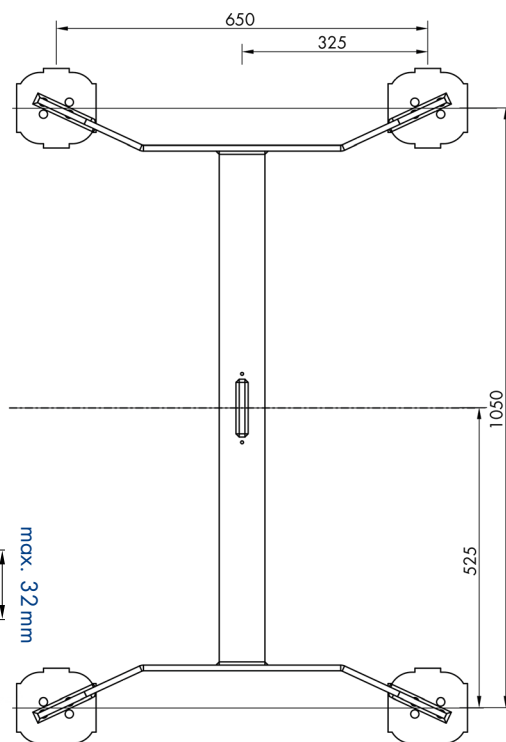

REQUIREMENTS

