



Electronic monitor wheel balancer Librak C1 PWS Pro

GTIN: 5063084202383

SKU: ROT.LBC1X.202383

22" full HD LCD monitor with integrated key board, industrial pc, complete with GAR112 and GAR375, incl. cones for cars, wheel hood, with pneumatic spindle, laser line and led lighting, rim diameter 10 – 30/33" (automatic/manual) | Red (RAL 3002)

DESCRIPTION


ELECTRONIC WHEEL BALANCERS WITH MONITOR

- Automatic width measurement.
- Automatic measurement of distance and diameter to facilitate weight positioning.
- Pneumatic locking device. (PWS models).
 - Internal led lighting of the rim to facilitate weight positioning.
 - Indication of weight positioning via a laser line at 6 o'clock (for adhesive weights).
 - New computerized electronics with Plug & Play System.
 - Balancing programs: Dynamic, Static, ALU and ALU-S, weight separation and weights hidden behind the spokes.
- The 22" monitor with integrated keyboard offers intuitive control: each button is perfectly aligned with the icons displayed on the screen, for fast, accurate interaction with no margin for error.
- When the cover is lowered, the wheel begins to turn automatically until it stops in the exact position for applying the weight to the outer side.
By pressing the corresponding command again, the wheel automatically repositions itself, this time indicating the point of application of the weight on the inner side.

Electronic monitor wheel balancer Librak C1 PWS Pro

2 / 5

- The software features modern and functional graphics
The user interface, designed to be extremely intuitive, guides the operator through every step of the process, simplifying operations and reducing learning time.
- The wide dashboard is equipped with high-capacity trays for organizing weights and dedicated compartments for accessories and tools.

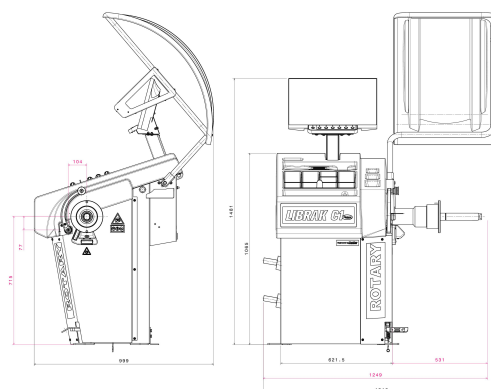

ACCESSORIES



Centering cone for vans and light trucks | Ø 118 – 174 mm

GAR113
Incl. spacer



Rim protection disk

GAR121



Precision type clamping flange Universal, for wheels with 3/4/5 holes | with studs

GAR132
Universal flange with stands



Type clamping flange Universal | for 3/4/5-hole rims without center hole

GAR131H
Universal flange for blind wheels | incl. center to center calliper



Wheel lift with automatic compensation of wheel weight

GAR324
80 kg, passenger car



Ultrasonic runout measuring device

GAR373



Wi-Fi antenna

GAR378
Enabling connection feature

DELIVERY




Centering cones for passenger car

GAR111
Incl. protection cup | Ø 44 – 112 mm | 1 set / 3 pieces



Tape-weight roller support

GAR375



Centering cone

GAR112
For off-road vehicles | Ø 95 – 132 mm

TECHNICAL DETAILS

Wheel data recording	Fully automatic
Colour	3002RAL
Tread depth measurement	Not possible
TeqLink	Not possible
Workshop-Net	Not possible
Measuring speed	< 100rpm
Measuring time	6s
Balancing accuracy +/-	1g
Display	LCD, backlit
Min. rim width	1,5"
Max. rim width	22"
Min. rim diameter	10"
Max. rim diameter	30 - 33"
Max. wheel width	500mm
Max. wheel diameter	1092mm
Max. wheel weight	70kg
Electrical connection	220 - 240 V, 50 - 60 Hz
Phases	1
Air supply	8bar
Max. air supply	10bar
Width	1316mm
Depth	999mm

Electronic monitor wheel balancer Librak C1 PWS Pro

5 / 5

Height 1850mm**Weight** 156kg**Country of Origin, customs** IT